


Super Fortress 70 residential door – data sheet

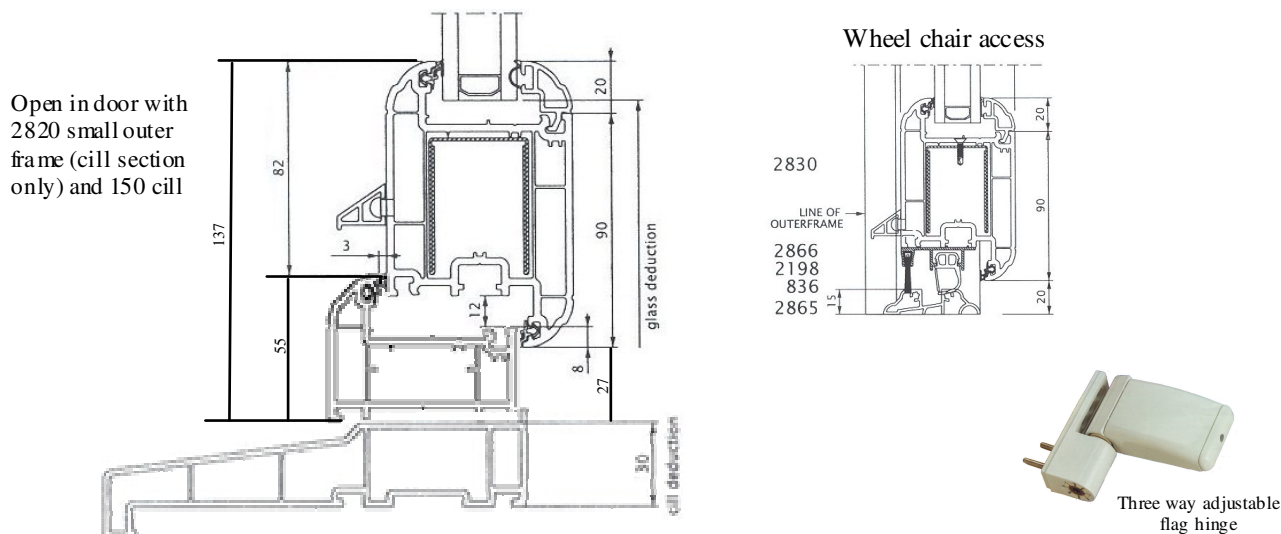

- Standard Deceuninck 70mm profile in accordance with BS7413
- Manufactured in accordance with BS7412
- Available in solid White, Rosewood or Sherwood
- All profiles have black low sightline rolled in gasket and weather-seal, **1999**
- Standard sculpted large outer frame, **2821** to head and jambs with **2820** to cill section
- Internally beaded sash for both open out and in
- **2830** open in door sash, **2831** open out door sash
- Standard 28mm scotia bead with co-extruded black gasket, **2840**
- Lever-Lever
- Fully welded outer frame, sash and mid rail (mullions mechanically jointed)
- All welded joints are knife finished on all profiles
- Concealed or face drainage
- Three multi-adjustable flag hinges
- Multi-shoot bolt locking, with two hooks, two rollers, two anti lift bolts, one deadbolt and one soft latch
- One piece keep with adjustable locking points

OPTIONS

- 28mm double glazed sealed units manufactured to EN1279
- Night ventilation facility (4000mm or 2x4000mm)
- Low 15mm Aluminium wheel chair threshold
- Lever/Pad split spindle option
- Panic bar gearing

REINFORCEMENT SPECIFICATION

- Mild galvanised steel to BS 2989
- Outer frame jambs both fully reinforced
- Sash jambs both reinforced